


SPECIFICATIONS

Size	Metric	British
Max. Working Height A	15.00m	49ft 3in
Max. Platform Height B	13.00m	42ft 8in
Overall Length(Without Outriggers)	3.98m	13ft 1in
Overall Length(With Outriggers) C	4.88m	16ft
Overall Width D	2.27m	7ft 5in
Overall Height(Rails Up) E	2.98m	9ft 9in
Overall Height(Rails Down) F	2.28m	7ft 6in
Platform Size(Length×Width)	3.98m×1.83m	13ft 1in ×6ft
Platform Extension Size G/H	1.43m/1.16m	4ft 8in/3ft 10in
Ground Clearance	0.30m	1ft
Wheelbase I	2.86m	9ft 5in
Turning Radius(Inside/Outside)	2.35m/5.20m	7ft 9in/17ft 1in
Tyres	33×12-20	33×12-20

Performance		
S.W.L	680kg	1499lb
S.W.L On Extension	227kg	500lb
Max. Occupants	7	7
Gradeability	50%	50%
Travel Speed(Stowed)	6.0km/h	3.73mph
Travel Speed(Raised)	1.1km/h	0.68mph
Max. Working Slope	X-2°/Y-3°	X-2°/Y-3°
Up/Down Speed	70/52sec	70/52sec

Weight		
Overall Weight(Without Outriggers)	7000kg	15432lb
Overall Weight(With Outriggers)	7900kg	17416lb

Power		
Diesel Engine	Kubota V2403/36.8kW	Kubota V2403/36.8kW
Diesel Tank	100L	26gal
Hydraulic Tank	130L	34gal

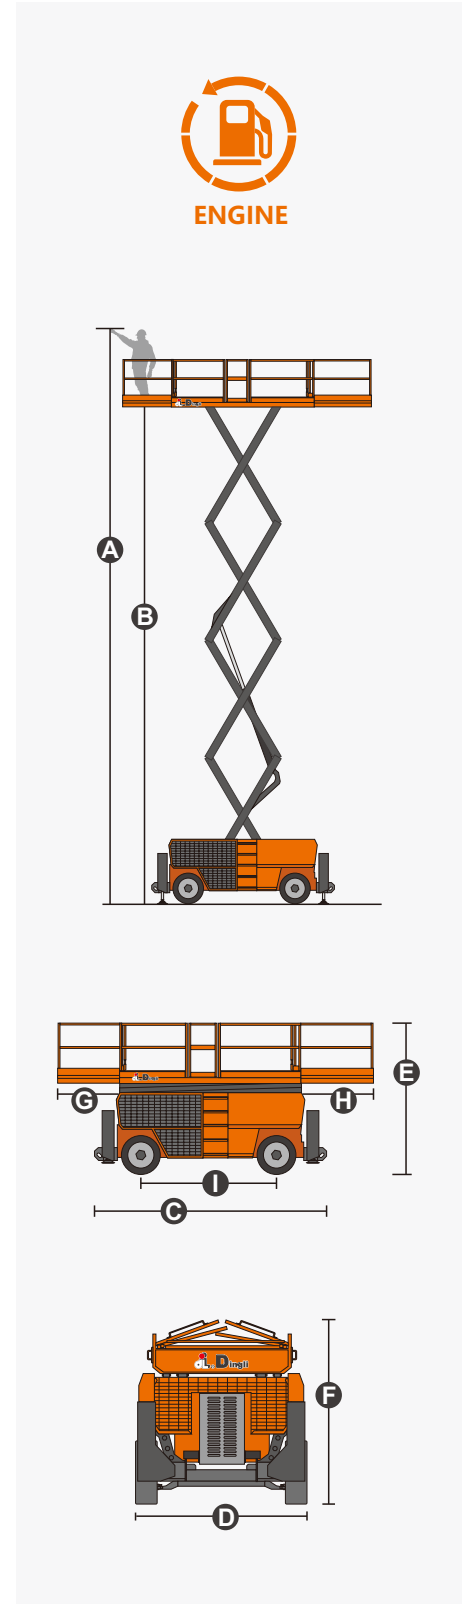

FEATURES

Standard Items

- Proportional Joystick Controls
- Self-Locking Gates
- Dual Slide-Out Platform Extension Deck
- Four-Wheel Drive
- Two-Wheel Steering
- Automatic Braking System
- Self-Weight Lowering System
- Tubing Explosion-Proof System
- Onboard Fault Diagnostic System
- Tilt Alarm
- Motion Alarm
- Horn
- Hour Meter
- Hydraulic Oil Cooling System
- Flashing LED Beacon
- Foldable Guard Rails
- Drive Enable
- Manual Brake Release
- Lanyard Attachment Point
- Standard Transport Forklift Pockets
- Tie-Down And Lifting Points
- Automatic Leveling Hydraulic Outriggers
- Anti-Restart Engine Protection
- Emergency Pump
- Emergency Stop Button
- Platform Load Sense System
- Oscillating Axle Chassis



ZHEJIANG DINGLI MACHINERY CO., LTD.

Address: No.188 Qihang Road,Deqing,Zhejiang P.R.C 313219

Telephone: +86(572)8681688

E-Mail: export@cndingli.com

<https://en.cndingli.com>