

BUILT FOR ROUGH TERRAIN



sales@machinexheavy.com
+852 9057 9035

All rights reserved. If you have any questions,
please contact us.



Machinex Global Limited
Unit B 11/F, Yam Tze Commercial Building
23 Thomson Road, Wan Chai
Hong Kong



Introduction

2WD

Strong flexibility
in rough terrain

100% differential lock.



**Compact
4WD**

product replenished
Rough Terrain fields



4WD

Superior performance
in extreme conditions

Traditional technology while
imported key components:
DANA integrated trans-axle,
Sauer Danfoss hydrostatic
system, tilting cabin.



Patented self-designed axle &
transmission, compact size meet
with European standard.

Engine

World renowned brands engine for superior performance.

MITSUBISHI S4S

Rated output 35.3kw/2250rpm >

Rated torque 182N.m/1800rpm >



YANMAR 4TNE98

Rated output 42.1kw/2300rpm >

Rated torque 196.3N.m/1700rpm >



ISUZU 6BG1QC

Rated output 82kw/2000rpm >

Rated torque 416N.m/1400-1600rpm >



MITSUBISHI D04EG

Rated output 36kw/2250rpm >

Rated torque 177N.m/1800rpm >



KU BOTA v2403(EuV+Tier4)

Rated output: 43.2kw/2600 rpm >

Rated torque: 198 N.m/1500rpm >



KU BOTA WG3800(EuV)

Rated output: 54.6kw/2400rpm >

Rated torque: GAS 246.8N.m/1500rpm >



KU BOTA V2607 (EUV)

Rated output: 48kw/2400rpm >

Rated torque: 225N.m/1500rpm >




Floating System

A superior full floating overhead guard is installed with rubber damping instead of the traditional rigid design. This greatly reduces machine vibration and offers a smoother ride over rough terrain and reduces operator fatigue.



Wide-view Mast

Wide-view mast provides excellent through-the-mast visibility improving the work efficiency and allowing safe operation of the forklift.

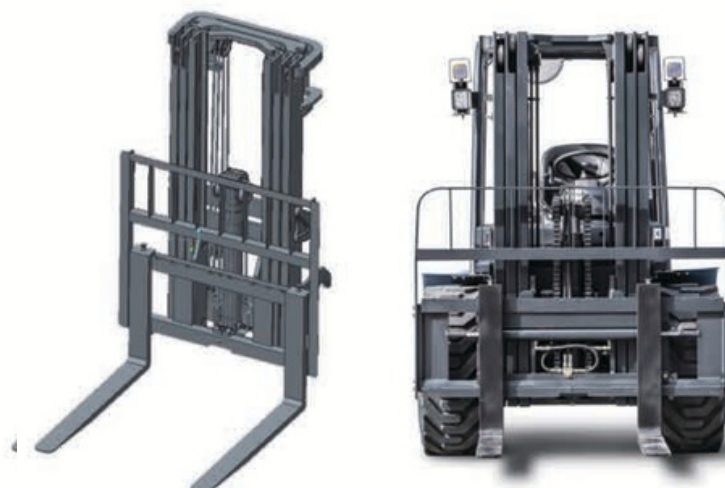

High Quality Tyres

Industrial tyres with a wide footprint giving it greater stability and lift capacity in rough work environments.



High Ground Clearance

Offer greater maneuverability and keep the machine moving in the roughest of applications.



Tilting Overhead Guard (4WD)

Equipped as standard with a tilting overhead guard, to ensure easy access to major components for inspection and service.




Upward Steering Cylinder (Compact 4WD)

Lay the steering cylinder upward to make the turning radius smaller and rear wheel steering angle bigger.



100% Differential Lock (2WD)

Power shift transmission with jaw type 100% differential lock provides ultimate traction during inclement weather conditions and rough operating surfaces.

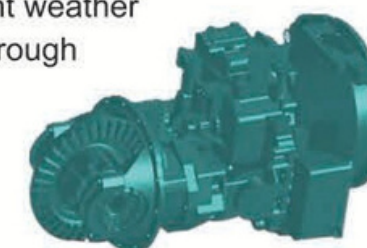


Our Solution, Your Decision

Body

Performance

	2WD				Compact 4WD			4WD	
YES ☒ / NO ☐	1.8T	2.5T	3.5T	5T	1.8T	2.5T	3.5T	2.5T	3.5T
Floated Overhead Guard	☐				☐			☐	
4WD-2WD Rocker Switch	☐				☐			☐	
Industrial Tyres (F/R)	☐ / ☐	☐ / ☐	☐ / ☐	☐ / ☐	☐ / ☐	☐ / ☐	☐ / ☐	☐ / ☐	☐ / ☐
Suspension Pedal	☐				☐			☐	
Truck Width (mm)	1450	1557.5	1600	2067	1450	1450	1600	1980	1980
Loaded into 20GP Container	☐	☐			☐	☐			
External Type Steering Cylinder	☐				☐			☐	
With Prefilter	☐				☐			☐	
LED Lights	Standard				Standard			Standard	
Safety Start System*	Standard				Standard			Standard	
Suspension Seat	Option				Option			Standard	
OPS system	Option				Option			Option	
Engine	YANMAR 4TNE98/MITSUBISHI S4S		YANMAR 4TNE98	ISUZU 6BG1QC	YANMAR 4TNE98 / MITSUBISHI S4S / MITSUBISHI D04EG			YANMAR 4TNE98	
Gradeability	20%	20%	16%	30%	80%/60%	50%	45%	38%	38%
Gradient	11.3°	11.3°	9°	16.7°	38.6°/31°	26.5°	24.2°	20.8°	20.8°
Min.Turning Radius(mm)	2840	2870	2870	3550	3120	3120	3120	4275	4295
Transmission Model	Hydraulic				Hydraulic			Hydrostatic	
Differential Lock Type	Jaw Type Differential Lock				Limited Slip Differential Lock			Limited Slip Differential Lock	
Differential Ratio	100%				45%			45%	

Safety Start System* The truck can't start if any below: 1-operator leaves the seat, 2-seatbelt unfastened, 3-hand brake released, 4-not in N position.

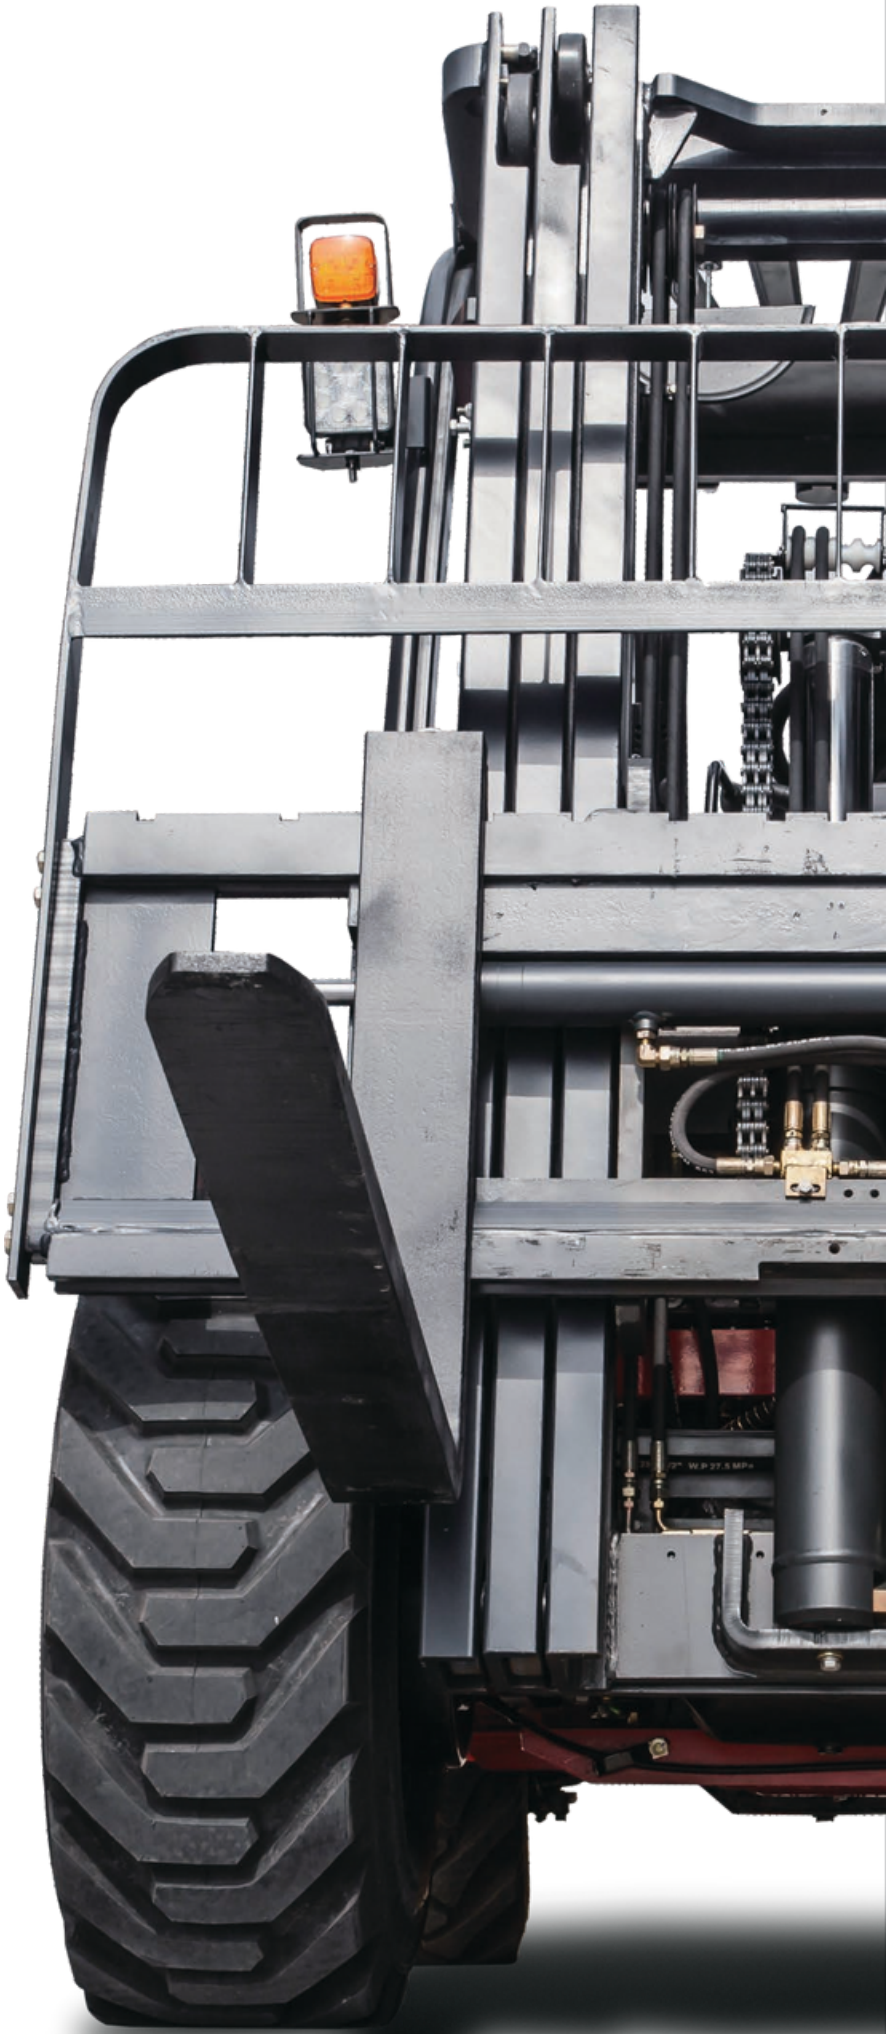



Forklift Specification

2WD 1.8T/2.5T/3.5T									
General	1	Model				MX18RT		MX25RT	MX35RT
	2	Power type				Diesel			
		Optional type				WV3/WE3/W(14)3			
	3	Rated capacity			Kg	1800		2500	3500
	4	Load centre			mm	500		500	500
Characteristic&Dimension	5	Lifting height			mm	3000		3000	3000
	6	Free lift			mm	105		160	165
	7	Fork size	L×W×T		mm	1070×100×35		1070×122×40	1070×125×45
	8	Fork regulating range	Min./Max.		mm	200-1315		250-1160	250-1160
	9	Mast tilt angle	F/R		Deg	10/12		10/12	10/12
	10	Front overhang			mm	509		586	601
	11	Rear overhang			mm	520		520	520
	12	Min.ground clearance(drive steer axle)			mm	270		270	270
	13	Overall dimensions	Length to face of fork (without fork)		mm	2910		2946	2956
	14		Overall width		mm	1440		1557.5	1600.5
	15		Mast lowered height		mm	2148		2265	2330
	16		Mast extended height (with backrest)		mm	4150		4175	4305
	17	Overhead guard height		mm	2256.5		2256.5	2276	
	18	Turning radius			mm	2840		2870	2870
19	Min. right angle stacking aisle width	Pallet size a ₁₂ =1000,b ₁₂ =1200		mm	4550		4726	4741	
		Pallet size a ₁₂ =1200,b ₁₂ =800		mm	4350		4856	4871	
Performance	20	Min. right angle stacking aisle width(pallet size a ₁₂ =1200,b ₁₂ =1200)			mm	2560		2870	2870
	21	Speed	Travel(Laden/Unladen)		Km/h	20/19		20/18	22/22(WE3)/20/18(WV3)
	22		Lifting(Laden)		mm/sec	610(WE3)/590(WV3)		570(WE3)/480(WV3)	450(WE3)/385(WV3)
	23		Lowering(Laden)		mm/sec	450		450	450
24	Max. Drawbar pull(Laden)			KN	15		17(WE3)/15(WV3)	17(WE3)/15(WV3)	
Tyre	25	Max. Gradeability(Laden)			%	20		20	16
	26	Tyre	Front			12-16.5-12PR		12-16.5-12PR	14-17.5-14PR
	27		Rear			27×10-12-12PR		27×10-12-12PR	27×10-12-12PR
	28	Tread	Front		mm	1125		1250.5	1250.5
29	Rear		mm	1185		1205	1205		
Weight	30	Wheelbase			mm	1880		1880	1880
	31	Self weight			kg	3700		4465	5180
	32	Weight Distribution	Laden	Front axle	kg	4730		5990	7725
	33			Rear axle	kg	770		975	955
	34		Unladen	Front axle	kg	1480		1785	2070
	35			Rear axle	kg	2220		2680	3110
36	Battery	Voltage/Capacity			V/Ah	12/90			
Power&Transmission	37	Engine	Model			4TNE98-BQFLC		S4S-455	
	38		Manufacture			YANMAR		MITSUBISHI	
	39		Rated output/r.p.m.		Kw	42.1/2300		35.3/2300	
	40		Rated torque/r.p.m.		N.m	186-206/1700		170±8/1700	
	41		No. of cylinder			4		4	
	42		Bore×Stroke		mm	98×110		94×120	
	43		Displacement		L	3.318		3.331	
	44		Fuel tank capacity		L	55		55	
	45	Transmission	Manufacture			China			
	46		Type			YQXD30MKS		YQXD30MKS	YQXD40MKS
	47		Stage	F/R		1/1			
	48	Operating pressure			Mpa	20			

Compact 4WD 1.8T/2.5T/3.5T										
General	1	Model			MX18FWRT		MX25FWRT		MX35FWRT	
	2	Power type			Diesel					
		Optional type			WV3/WE3/(9A)3/W(14)3					
	3	Rated capacity		kg	1800		2500		3500	
	4	Load centre		mm	500		500		500	
Characteristic&Dimension	5	Free lift height		mm	3000		3000		3000	
	6	Free lift		mm	105		160		165	
	7	Fork size	L×W×T	mm	1070×100×35		1070×122×40		1220×122×45	
	8	Fork regulating range	Min./Max.	mm	200-1315		250-1310		250-1500	
	9	Mast tilt angle	F/R	Deg	10/12		10/12		10/12	
	10	Front overhang		mm	520		586		601	
	11	Rear overhang		mm	600		600		600	
	12	Min.ground clearance(drive steering axle)		mm	219		219		219	
		Min.ground clearance(chassis) (Unladen/Laden)		mm	230/215		230/215		224/230	
		Min.ground clearance(mast) (Unladen/Laden)		mm	275/250		270/255		270/250	
		Ground clearance (drawbar pin)		mm	354.5		354.5		430	
		Height from seat surface to overhead guard inner side		mm	990		990		1043	
	13	Overall dimensions	Length to face of fork(without fork)	mm	3000		3066		3081	
	14		Overall width	mm	1450		1450		1600	
	15		Mast lowered height	mm	2145		2235		2330	
	16		Mast extended height(with backrest)	mm	4140		4175		4305	
	17		Overhead guard height	mm	2256		2256		2276	
	18	Turning radius		mm	3120		3120		3120	
	19	Min. right angle stacking aisle width	Pallet size a ₁₂ =1000,b ₁₂ =1200	mm	4629		4706		4921	
			Pallet size a ₁₂ =1200,b ₁₂ =800	mm	4829		4906		4871	
	20	Min. right angle stacking aisle width(pallet size a ₁₂ =1200,b ₁₂ =1200)		mm	2670		2670		2725	
	Performance	21	Speed	Type		WV3/W(6)3	WE3	WV3/W(6)3	WE3	WV3/W(6)3
22		Travel(Unladen/Laden)		km/h	18/17	20/19	18/17	20/19	18/17	19/18
23		Lifting(Unladen/Laden)		mm	630/590	640/610	620/570	650/600	480/450	510/485
24		Lowering(Unladen/Laden)		mm	420/450	420/450	510/450	510/450	500/450	500/450
25		Max. Drawbar pull(Unladen/Laden)		KN	31	38	38	38	27	38
	Max. Gradeability(Unladen/Laden)		%	50	80	50	50	30	45	
Tyre		Braking distance		m	≤6					
	26	Tyre	Front		12-16.5-12PR		12-16.5-12PR		14-17.5L-14PR	
	27		Rear		10.0/75-15.3		10.0/75-15.3		10.0/75-15.3	
		Tyre pressure(Front/Rear)		MPa	0.62/0.55		0.62/0.55		0.55/0.55	
	28	Tread	Front	mm	1123		1123		1250	
	29		Rear	mm	1190		1190		1190	
		Ground clearance (Front tyre centre)(Unladen/Laden)		mm	405.5/385		405.5/385		450.5/425	
	Ground clearance (Rear tyre centre)(Unladen/Laden)		mm	370/350		370/350		370/385		
Weight	30	Wheelbase		mm	1880		1880		1880	
		Self weight		kg	4255		4830		5545	
	32	Weight Distribution	Laden	Front Axle	kg	4602		6597		7872
	33			Rear Axle	kg	1453		733		1073
	34		Unladen	Front Axle	kg	1702		2173		2345
35	Rear Axle			kg	2553		2657		3100	
Power&Transmission	36	Battery	Voltage/Capacity		V/Ah	12/90				
	37	Engine	Model			S4S	D04EG	4TNE98-BQFLC		
	38		Manufacture			MITSUBISHI	MITSUBISHI	YANMAR		
	39		Rated output/r.p.m.		Kw	35.3/2250	36/2250	42.1/2300		
	40		Rated torque/r.p.m.		N.m	182/1800	177/1800	186-206/1700		
	41		No. of cylinder			4	4	4		
	42		Bore×Stroke		mm	94×120	94×120	98×110		
	43		Displacement		L	3.31	3.331	3.318		
	44		Fuel tank capacity		L	55				
	45	Transmission	Manufacture			China				
46	Type			FSDT35I						
47	Stage		F/R			2/1				
48	Operating pressure		MPa	16.5		20		20		

Mast Specification

Type	Model	Max. fork height	Overall height			Free lift						Front Overhang			Tilt range		Capacity at max. height							
			Lowered			With backrest			Without backrest						FWD		BWD		Loand Center 500mm					
																			Without side shift carriage			With side shift carriage		
			1.8T	2.5T	3.5T	1.8T	2.5T	3.5T	1.8T	2.5T	3.5T	1.8T	2.5T	3.5T	Deg	Deg	1.8T	2.5T	3.5T	1.8T	2.5T	3.5T		
		mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	Deg	Deg	kg	kg	kg	kg	kg	kg		
wide view 2-stage mast	M330	3300	2298	2385	2480	105	160	165	105	160	165	509	585	600	10°	12°	1800	2500	3500	1800	2500	3200		
	M350	3500	2398	2485	2580	105	160	165	105	160	165	509	585	600	10°	12°	1800	2500	3500	1800	2500	3200		
	M370	3700	2498	2585	2680	105	160	165	105	160	165	509	585	600	10°	12°	1800	2500	3500	1800	2500	3200		
	M400	4000	2698	2785	2880	105	160	165	105	160	165	509	585	600	10°	12°	1800	2500	3400	1800	2500	3100		
	M450	4500	2948	3035	3130	105	160	165	105	160	165	509	585	600	10°	12°	1500	2200	3100	1400	2100	2900		
	M500	5000	3198	——	——	105	——	——	105	——	——	509	——	——	6°	6°	1300	——	——	1200	——	——		
	M550	5500	3498	——	——	105	——	——	105	——	——	509	——	——	6°	6°	1000	——	——	900	——	——		
	M600	6000	3748	——	——	105	——	——	105	——	——	509	——	——	6°	6°	800	——	——	400	——	——		
Full free 3-stage mast	TFM400	4000	2033	2080	2205	850	888	890	1230	1333	1336	509	590	620	10°	12°	1800	2500	3400	1800	2400	3100		
	TFM435	4350	2158	2205	2330	980	1013	1015	1360	1458	1461	509	590	620	10°	12°	1800	2400	3000	1600	2200	2900		
	TFM450	4500	2208	——	——	1030	——	——	1410	——	——	509	——	——	10°	12°	1500	——	——	1400	——	——		
	TFM470	4700	——	2320	2445	——	1128	1130	——	1573	1576	——	590	620	——	——	——	2100	2800	——	1900	2500		
	TFM500	5000	2408	2455	2580	1230	1263	1265	1610	1708	1710	509	590	620	6°	6°	1300	1900	2600	1200	1600	2300		
	TFM550	5500	2573	2620	2745	1390	1428	1430	1770	1873	1875	509	590	620	6°	6°	1000	1500	2300	900	1200	2100		
	TFM600	6000	2758	2805	2930	1580	1613	1615	1960	2058	2060	509	590	620	6°	6°	800	1200	1900	400	800	1600		
	TFM650	6500	2973	3020	3145	1790	1828	1830	2180	2273	2275	509	590	620	6°	6°	350	700	1300	200	400	1100		


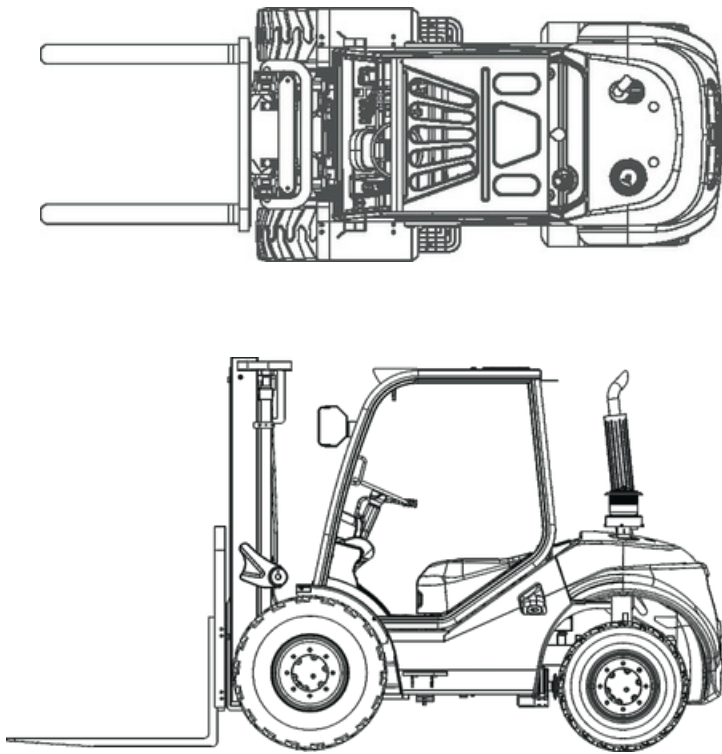
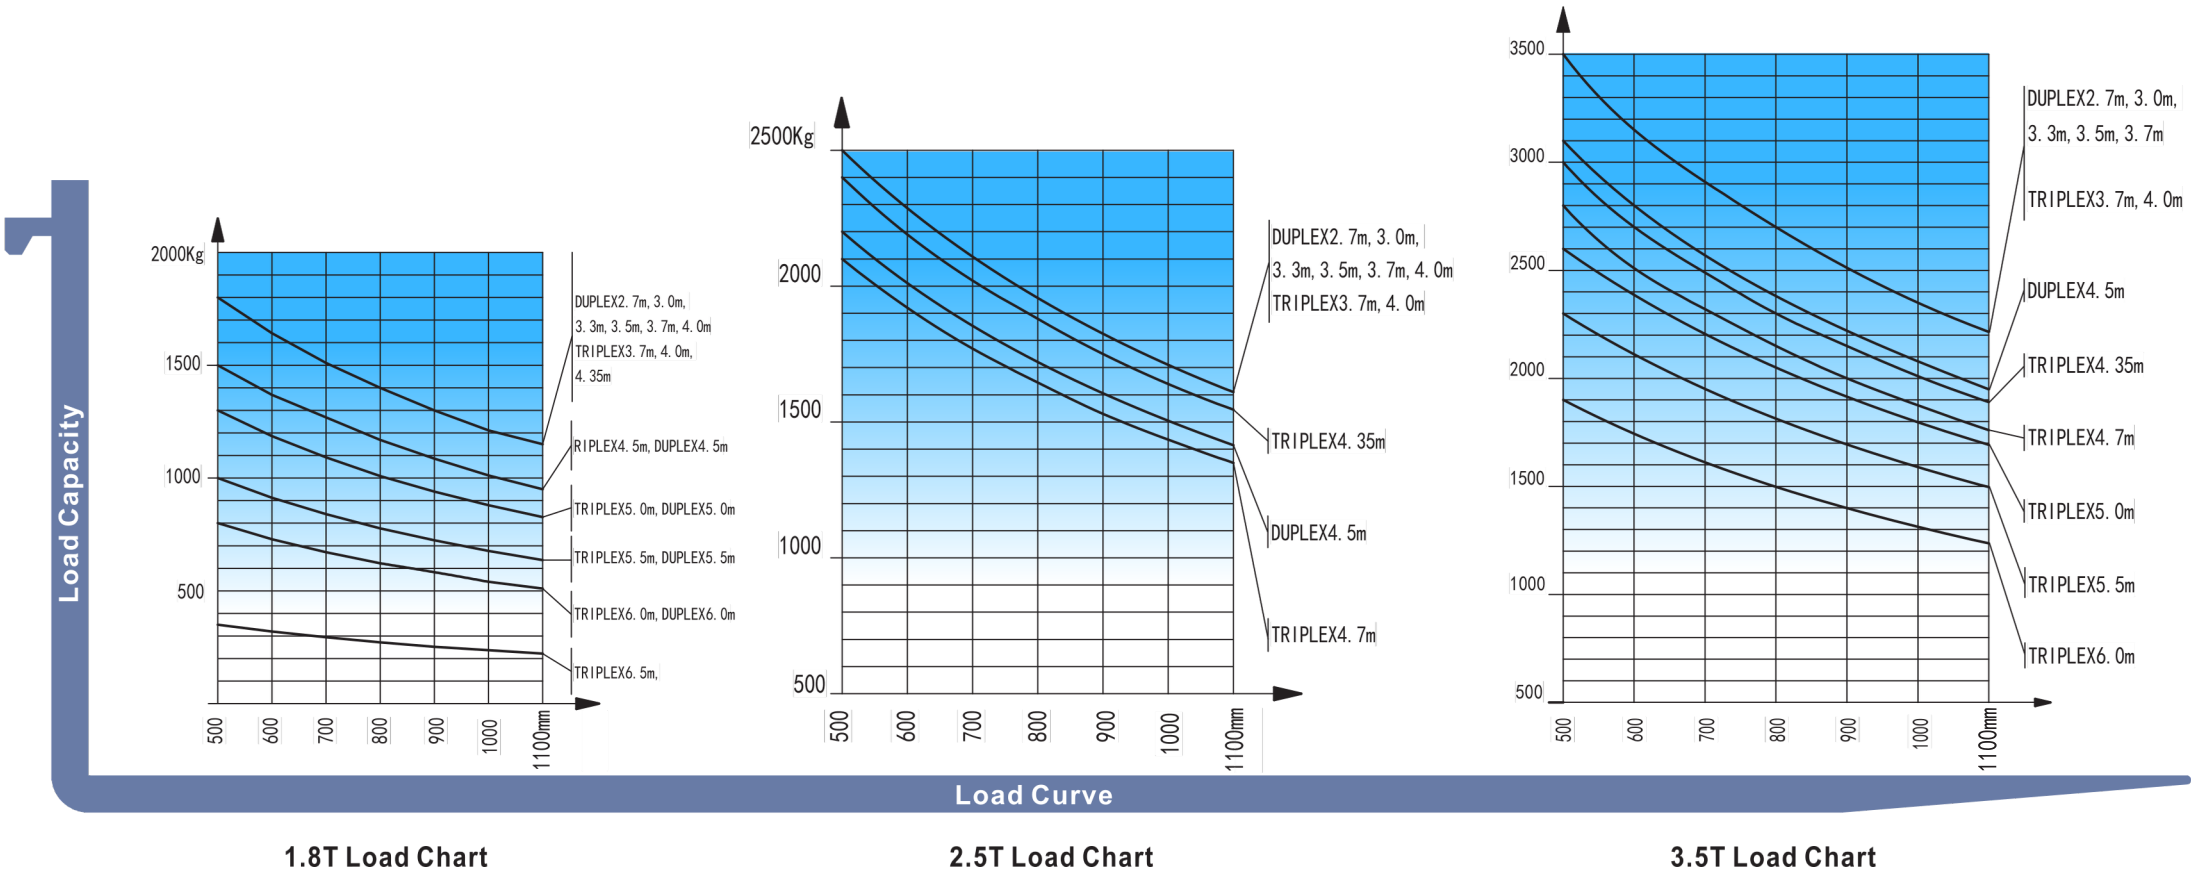


Forklift Specification

Mast Specification

2WD 5T					
General	1	Model		MX50RT-C2W (3) 3	MX50RT-C2WF 3
	2	Power type		Diesel	Diesel
	3	Optional type		W(13B)3	
	4	Rated capacity		Kg	5000
	5	Load centre		mm	600
Characteristic&Dimension	6	Lift height		mm	3000
	7	Free lift height		mm	145
	8	Fork size	L×W×T	mm	1220*150*55
	9	Fork regulating range	Min./Max.	mm	300/1654
	10	Mast tilt angle	F/R	Deg	15° /15°
	11	Front overhang		mm	732
	12	Rear overhang		mm	764
	13	Ground clearance	Bottom of mast	mm	320
	14	Overall dimensions	Length to face of fork (without fork)	mm	3622
	15		Overall width	mm	2067
	16		Mast lowered height	mm	2565
	17		Mast extended height (with backrest)	mm	4170
	18		Overhead guard height	mm	2545
	19	Min. turning radius		mm	3550
	20	Min. right angle aisle width		mm	5700
Performance	21	Speed	Travel(Unladen)	Km/h	20/19
	22		Lifting(Laden)	mm/s	380
	23		Lowering(Laden)	mm/s	370
	24	Max. Drawbar pull(Laden)		KN	50
	25	Max. Gradeability(Laden)		%	20
Tyre	26	Tyre	Front		445-65-22.5PR
			Rear		12.5/80-18
	27	Tread	Front	mm	1620
			Rear	mm	1720
	28	Wheelbase		mm	2125
Weight	29	Self weight		kg	8450
	30	Axle distribution	Laden	Front axle	kg
	31			Rear axle	kg
	32		Unladen	Front axle	kg
	33			Rear axle	kg
Power&Transmission	34	Engine	Model		TCD 3.6 L4
	35		Manufacture		DEUTZ
	36		Rated output/r.p.m.	Kw	55.4/2200-2300
	37		Rated torque/r.p.m.	N.m	390/1300
	38		No. of cylinder		4
	39		Bore×Stroke	mm	98 × 120
	40		Displacement	L	3.6
	41	Battery	Voltage/Capacity	V/Ah	2*12/80
	42	Operating pressure		Mpa	20

Type	Model	Max. fork height	Overall height Lowered	Free lift		Front Overhang	Tilt range		Capacity	
				With backrest	Without backrest	5.0T	FWD	BWD	capacity at max. height	
									Without side shift carriage	With side shift carriage
		mm	mm	mm	mm	Deg	Deg	kg	kg	
wide view 2-stage mast	M330	3300	2715	145	145	732	15	15	5000	4700
	M350	3500	2815	145	145	732	15	15	5000	4700
	M370	3700	2915	145	145	732	15	15	5000	4700
	M400	4000	3115	145	145	732	15	15	5000	4700
	M450	4500	3365	145	145	732	15	15	4500	4050
	M500	5000	3615	145	145	732	15	15	4000	3600
Full free 3-stage mast	TFM400	4000	2560	1000	1350	765	15	15	5000	4500
	TFM435	4350	2685	1125	1475	765	15	15	4500	4050
	TFM450	4500	2736	1176	1526	765	15	15	4000	3600
	TFM470	4700	2802	1242	1592	765	15	15	3700	3350
	TFM500	5000	2935	1375	1725	765	10	15	3300	2950
	TFM600	6000	3300	1740	2090	765	10	15	2000	1800

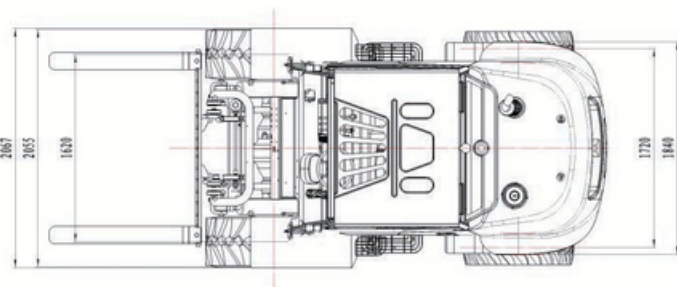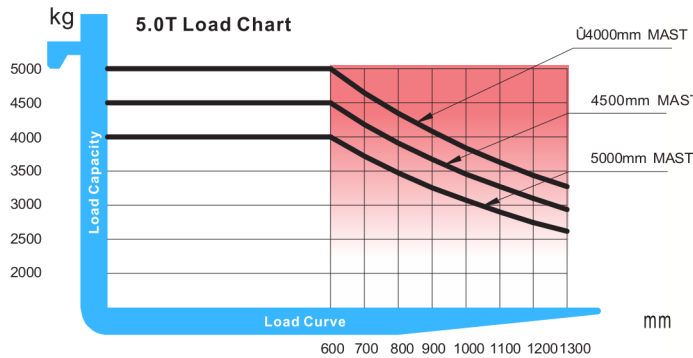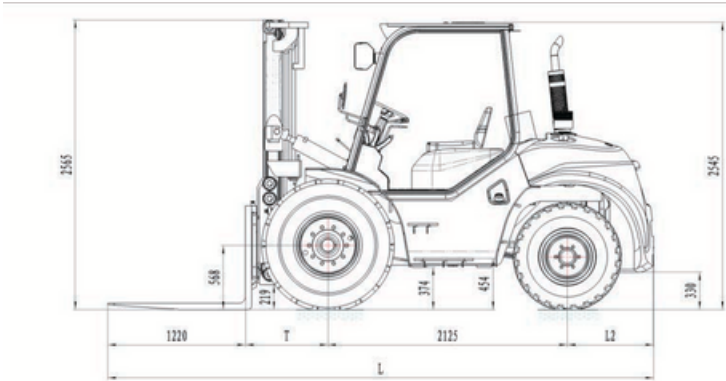

Forklift Specification

4WD 2.5T/3.5T							
General	1	Model			MX25RTJ-C4WE	MX35RTJ-C4WE	
	2	Power type			diesel	diesel	
	3	Rated capacity		Kg	2500	3500	
	4	Load centre		mm	500	500	
Characteristic&Dimension	5	Lift height		mm	3000	3000	
	6	Free lift height		mm	160	165	
	7	Fork size	L×W×T	mm	1070×125×40	1220×125×45	
	8	Fork regulating range	Min./Max.	mm	250-1560	250-1560	
	9	Mast tilt angle	F/R	Deg	10/12	10/12	
	10	Front overhang		mm	680	680	
	11	Rear overhang		mm	590	597	
	12	Min.ground clearance		mm	394.5	410	
	13	Overall dimensions	Length to face of fork (without fork)	mm	3182	3227	
	14		Overall width	mm	1980	1980	
	15		Mast lowered height	mm	2454	2470	
	16		Mast extended height (with backrest)	mm	4270	4400	
	17		Overhead guard height	mm	2250	2250	
	18	Min. turning radius		mm	4275	4295	
	19	Min. right angle stacking aisle width(add load length and clearance)		mm	8375	8395	
Performance	20	Speed	Travel(Unladen)	Km/h	20	20	
	21		Lifting(Laden)	mm/s	540	450	
	22		Lowering(Laden)	mm/s	630	540	
	23	Max. Drawbar pull(Laden/unladen)		KN	34.3	34.3	
	24	Max. Gradeability(Loaden)		%	38	38	
Tyre	25	Tyre	Front		405/70-20-14PR	405/70-20TL	
	26		Rear		10.0/75-15.3-14PR	10.0/75-15.3	
	26	Tread	Front	mm	1570	1570	
	27		Rear	mm	1440	1440	
	27	Wheelbase		mm	1950	1950	
Weight	28	Self weight		kg	4900	5750	
	29	Weight Distribution	Laden	Front axle	kg	6290	7990
	30			Rear axle	kg	1110	1260
	31		Unladen	Front axle	kg	2265	2450
	32			Rear axle	kg	2635	3300
	Power&Transmission		33	Battery	Voltage/Capacity		V/Ah
34		Engine	Model			4TNE98-BQFLC	
35			Manufacture			YANMAR	
36			Rated output/r.p.m.		Kw	42.1/2300	
37			Rated torque/r.p.m.		N.m	196.3/1700	
38			No. of cylinder			4	
39			Bore×Stroke		mm	98×110	
40			Displacement		L	3.319	
41			Fuel tank capacity		L	3.319	
42			Transmission	Manufacture			DANA
43		Type		Front axle		112	
44				Rear axle		211	
45				Transfer case		311	
46		Stage		F/R			1/1
47		Static system pressure		Mpa	40		
48		Operating pressure(For attachments)		Mpa	20		
49		Min.right angle stacking aisle width		mm	2980	3000	

Mast Specification

Type	Model	Overall height		Free lift				Front Overhang		Tilt range		Capacity			
		Lowered		With backrest		Without backrest		2.5T	3.5T	FWD	BWD	capacity at max. height			
		2.5T	3.5T	2.5T	3.5T	2.5T	3.5T	2.5T	3.5T	FWD	BWD	Without side shift carriage		With side shift carriage	
		mm	mm	mm	mm	mm	mm	mm	mm	Deg	Deg	kg	kg	kg	kg
wide view 2-stage mast	M270	2320	2320	165	165	165	165	700	700	10	12	3500	3500	3200	3200
	M330	2620	2620	165	165	165	165	700	700	10	12	3500	3500	3200	3200
	M350	2720	2720	165	165	165	165	700	700	10	12	3500	3500	3200	3200
	M370	2820	2820	165	165	165	165	700	700	10	12	3500	3500	3200	3200
	M400	3020	3020	165	165	165	165	700	700	10	12	3400	3400	3100	3100
Full free 3-stage mast	M450	3270	3270	165	165	165	165	700	700	10	12	3100	3100	2900	2900
	TFM370	2255	2255	798	798	1243	1243	700	700	10	12	3500	3500	3100	3100
	TFM400	2345	2345	888	888	1333	1333	700	700	10	12	3500	3500	3100	3100
	TFM435	2470	2470	1013	1013	1458	1458	700	700	10	12	3000	3000	2900	2900
	TFM470	2605	2605	1128	1128	1573	1573	700	700	10	12	2800	2800	2500	2500
	TFM500	2720	2720	1263	1263	1708	1708	700	700	6	6	2800	2800	2500	2500
	TFM550	2885	2885	1428	1428	1873	1873	700	700	6	6	2500	2500	2300	2300
	TFM600	3070	3070	1613	1613	2058	2058	700	700	6	6	2100	2100	1800	1800

